



# THJZ-6 SELF PROPELLED SCISSOR LIFT



SPECIFICATION

01

| Model                            | THJZ-6          |
|----------------------------------|-----------------|
| Max. Working Height              | 8m              |
| Max. Platform Height             | 6m              |
| Load Capacity                    | 320kg           |
| Platform Size                    | 2.27×1.12×1.1m  |
| Overrall Size (Unfold Guardrail) | 2.47×1.15×2.2m  |
| Overrall Size (Fold Guardrail)   | 2.47×1.15×1.66m |
| Extended Table                   | 0.9m            |
| Extended Table Load Capacity     | 113kg           |
| Wheel Base                       | 1.895m          |
| Lifting Motor                    | 24v/3.3kw       |
| Up/down Speed                    | 4-6m/min        |
| Moving Speed (Folded State)      | 3.5km/h         |
| Moving Speed (Lifting State)     | 0.8km/h         |
| Battery                          | 4×6V/230Ah      |
| Charger                          | 24V/30A         |
| Hydraulic Wheel                  | Φ381×127mm      |
| Weight                           | 2200kg          |



# Tuhe Self Propelled Scissor Lift

Jinan Tuhe Heavy Industry Machinery Co., Ltd.



## Emergency Stop Button

It can avoid accidents or damage, protect the safety of personnel and the integrity of equipment.



## Explosion-proof Valves

Explosion-proof valves can keep equipment and personnel safe and provide long-lasting protection.



## Manual Lowering Valve

The manual drop valve is especially suitable for occasions that require quick response or manual control in emergency situations. It is easy to use and quick to respond.



## Electrophoresis Technique

It has a good coating effect on complex parts, and the paint film quality of electrophoretic coating is good, and the antirust ability is strong.



## Non-slip Platform

It can effectively protect the safety of staff, improve work efficiency and production efficiency.



## Solid Tire

Solid tires have the advantages of high strength, no need to inflate, strong puncture resistance, strong adaptability and long life.



**Detail Name**

**Description And Picture**

**Extended Platform**

Extended mesa guardrail with automatic locking doors which could pass through in small space, outspread platform to enlarge working range, more convenient for workers.



**Electrophoresis  
Anti-rust**

High Strength Scissors, produced by Rectangle Tubes, which make the lift more Stable.



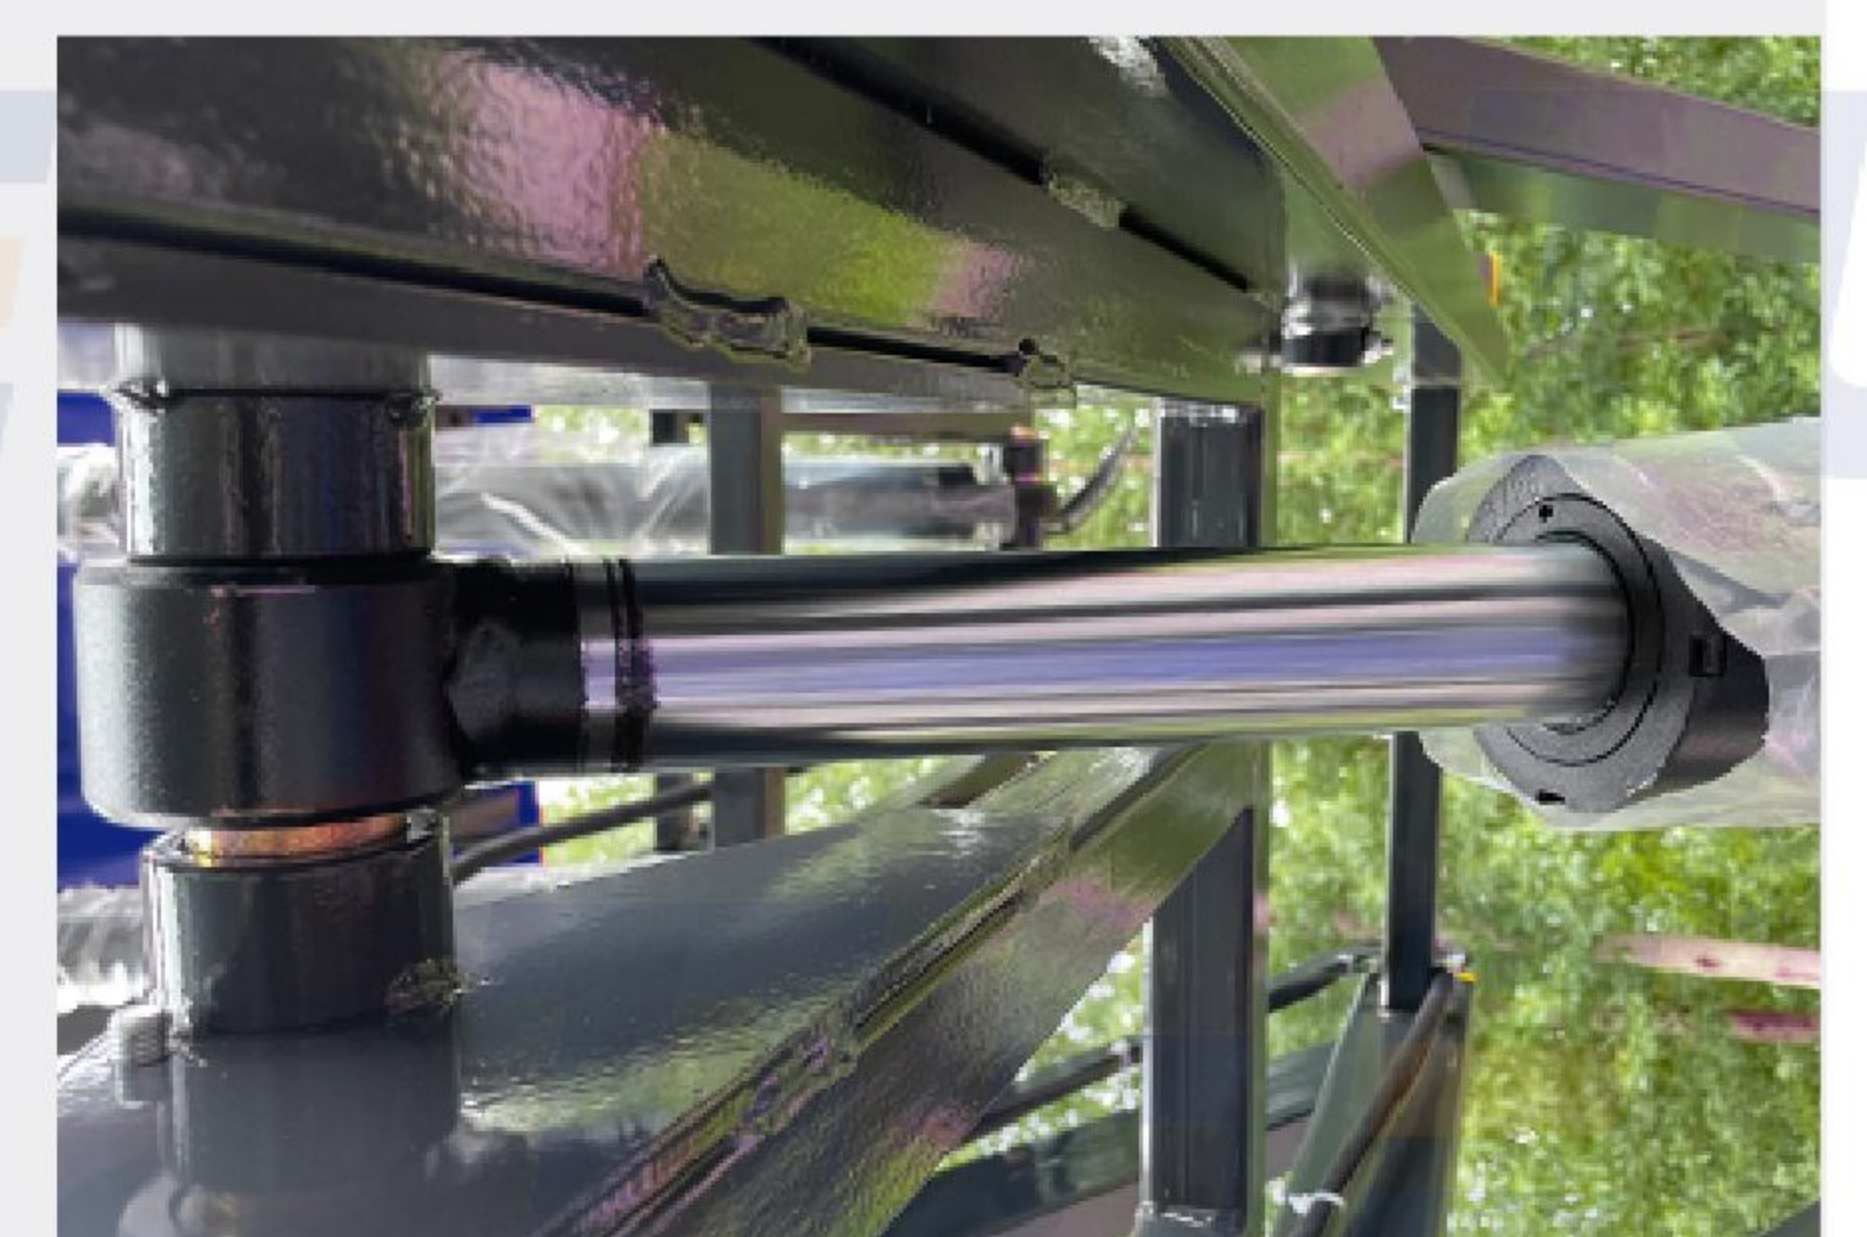
**Electric Control  
Handle**

Platform control handle. Each control button has the instruction mark, the user can understand how it works and easy to operate to up down or turn.





**Anti-explosion  
Cylinder**

Made of high-strength steel by a laser cutting machine, it is used for daily maintenance and overhaul of the machine, and acts as a support pole to avoid safety problems for maintenance personnel.





| Detail Name                          | Description And Picture   |
|--------------------------------------|---|
| <p><b>Chassis Control</b></p>        | <p>1.Emergency stop;<br/>2.key switch which could choose ground control or platform control;<br/>3.Button for easy operation up and down.</p>    |
| <p><b>Explosion-proof Tubing</b></p> | <p>Double layer steel mesh high pressure anti-explosion proof Increase of tubing safety factor.</p>    |
| <p><b>Battery Group</b></p>          | <p>Long working hours and strong endurance.</p>    |
| <p><b>Rubber Wheel</b></p>           | <p>Non-marking PU Driving Wheels Shock absorbers, no scratches on the ground, the service life is longer than the general pneumatic tire.</p>  |